



Where can I view project documents?

Online at:

<http://www.nyc.gov/html/oer/html/repository/RBrooklyn.shtml>

Internet access to view documents is available at the public library.

The closest location is:

Brooklyn Library
Marcy Branch
617 Dekalb Avenue
Brooklyn, NY 11216

Please call (718) 935-0032
for hours of operation

Whom can I contact for project information?

Horace Zhang
Project Manager
NYC OER
100 Gold Street, 2nd Floor
New York, NY 10038
212-788-8484
HZhang@dep.nyc.gov

Or

Shaminder Chawla
Deputy Director
NYC OER
(212) 442-3007
schawla@dep.nyc.gov

For more information visit:
www.nyc.gov/oer

NYC VCP Cleanup Plan Remedial Activities to Begin

The New York City Office of Environmental Remediation (OER) is providing this Fact Sheet pursuant to the New York City Voluntary Cleanup Program (VCP). OER has approved the Remedial Action Work Plan (RAWP) submitted by 683 Marcy Realty, LLC for 683 Marcy Avenue in the Bedford-Stuyvesant section of Brooklyn, New York. The remedial work will begin in March 2014. The RAWP can be reviewed electronically or in person at the document repositories identified in the box at left.

Site Description

The Site is 10,000 square feet and is currently undeveloped and vacant. The proposed future use of the Site consists of an 8-story residential building with 4,220 square feet cellar used for storage and utilities. The property will also have a parking garage at grade.

Summary of the Remedy

The remedial action for 683 thru 685 Marcy Avenue will entail soil excavation and the installation of a composite cover system, and vapor barrier.

The specific elements of the proposed remedial action include:

- Preparation of a Community Protection Statement and performance of all required NYC VCP citizen participation activities according to an approved Citizen Participation Plan;
- Performance of a Community Air Monitoring Program for particulates and volatile organic carbon compounds;
- Establishment of Track 4 Site Specific Soil Cleanup Objectives (SCOs);
- Excavation and removal of soil/fill in excess of SCOs;
- Transportation and off-site disposal of all soil/fill material at permitted facilities in accordance with applicable laws and regulations for handling, transport, and disposal of contaminated soil;
- Collection and analysis of end-point samples to determine if the remedy attains Track 4 SCOs;
- Construction and maintenance of an engineered composite cover;
- Installation of a vapor barrier system beneath the building slab;
- Establishment of institutional controls and site management;
- Submission of a Remedial Action Report (RAR) that describes the remedial activities, certifies that the remedial requirements have been achieved, defines the Site boundaries, and describes all engineering and institutional controls to be implemented at the Site.

Cleanup activities are scheduled to begin in March and are expected to be completed by June 2014. Construction of the building foundation and rear yard composite cap, as well as the installation of the vapor barrier is expected to be completed in two months.

Next Steps: After the enrollee completes the remedial work, a RAR will be prepared and submitted to OER. The RAR will describe the cleanup activities and certify that all cleanup requirements were met. Once the RAR is approved, OER will issue a Notice of Completion, a City liability release, and a New York City Green Property Certificate. OER will then issue a fact sheet announcing the completion of the remedial action and identify all engineering and institutional controls (if required) to be used at the Site.

Direct Link to Document Repository: <http://www.nyc.gov/html/oer/html/repository/RBrooklyn.shtml>

OR scan with your smart phone:



Figure 1 – Site Location Map

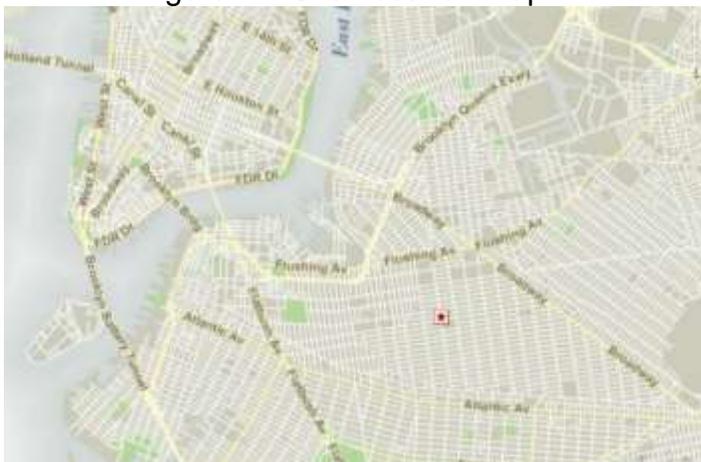


Figure 2 – Site Map

